


P-05S SAFETY HARNESS

EN 361 EN 358



Ref.: AB 105 02

Harness with front, dorsal anchorage point and work positioning belt.
Size: M-XL - 1160g
XXL - 1260g
One regulation for legs and shoulders straps.

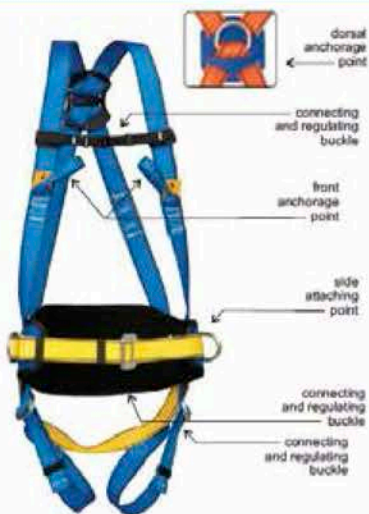

P-71 *New construction!* SAFETY HARNESS

EN 361 EN 358 EN 813



Ref.: AB 171 01

Harness with front and dorsal anchorage point. Attaching point for sitting position. Work positioning belt.
Size: M-XL - 1660g
XXL - 1760g
Separate regulation for legs and shoulders straps.




P32 PRO

ARNÉS ANTICAÍDA

Certificado
CE EN 361

- 2 puntos de enganche: esternal y dorsal
- Rápido de colocar
- Hombros revestidos para mayor comodidad

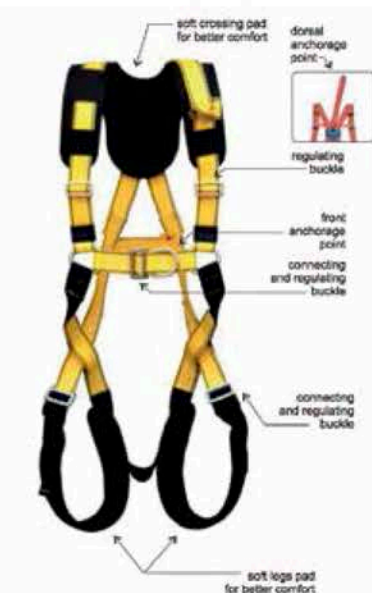

P-33EL SAFETY HARNESS *NEW!*

EN 361




Ref.: AB 133 01

Harness with front and dorsal anchorage point.
Size: M-XL - 1500g
XXL - 1660g
Separate regulation for legs and shoulders straps.



Also certificate with automatic alu buckles
For each buckle please add 3 €

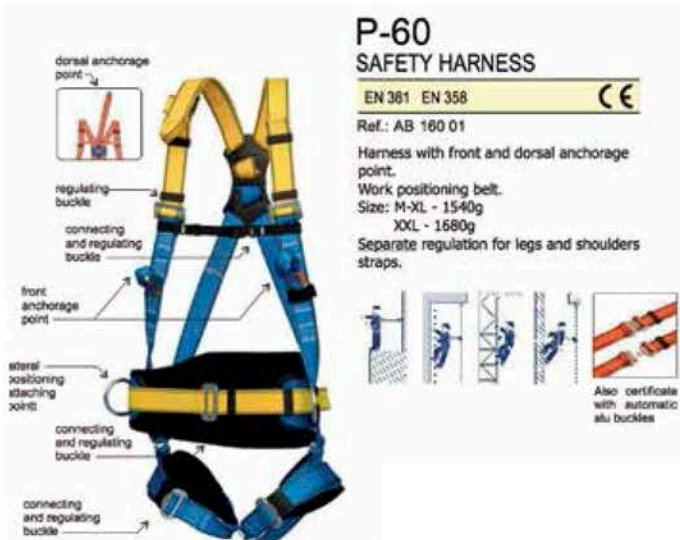

P-60 SAFETY HARNESS

EN 361 EN 358



Ref.: AB 160 01


Harness with front and dorsal anchorage point. Work positioning belt.
Size: M-XL - 1540g
XXL - 1680g
Separate regulation for legs and shoulders straps.



Also certificate with automatic alu buckles

PROTECCIÓN PERSONAL

ESLINGAS SIN ABSORBEDOR / CON ABSORBEDOR

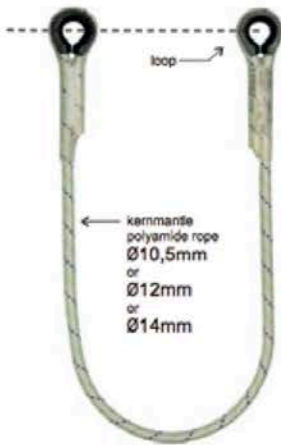

Can be used as:
- safety lanyard with energy absorber;
- work positioning lanyard;
Material: Polyamide;

LB 101 universal safety lanyard \varnothing 10,5mm

EN 354 EN 358



Ref.: LB 101 xx (xx - length)

Standards:

LB 101 10 - length 1,0m

LB 101 15 - length 1,5m

LB 101 20 - length 2,0m

OTHER LENGTHS ON REQUEST


ROPE
 \varnothing 10,5mm

AZ 002
galvanized steel
opening: 18 mm
weight: 220 g

AZ 022
galvanized steel
opening: 50 mm
weight: 600 g

AZ 002
galvanized steel
opening: 18 mm
weight: 220 g

AZ 022
galvanized steel
opening: 50 mm
weight: 600 g

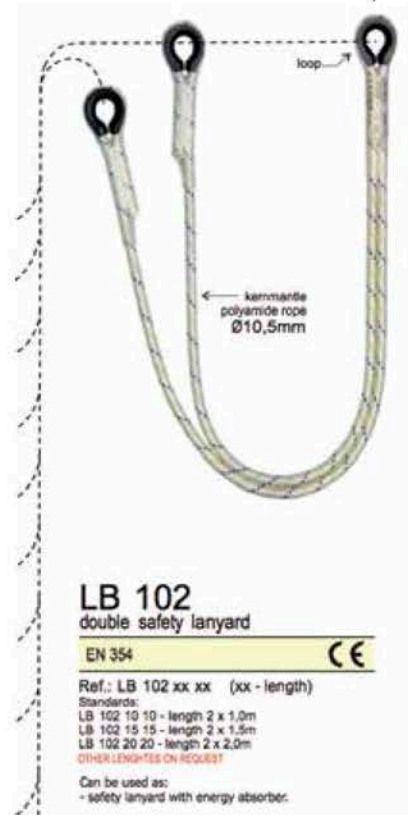

LB 102 double safety lanyard

EN 354



Ref.: LB 102 xx xx (xx - length)

Standards:

LB 102 10 10 - length 2 x 1,0m

LB 102 15 15 - length 2 x 1,5m

LB 102 20 20 - length 2 x 2,0m

OTHER LENGTHS ON REQUEST

Can be used as:
- safety lanyard with energy absorber.



- **Compuesto con dos conectores de acero con anillo roscado**
- **Banda elástica integrada**
- **Facilita los desplazamientos del operador gracias a su menor dimensión**

CUERDA

ANTICAÍDA CON ABSORBEDOR

Certificado
CE EN 355

DATOS TÉCNICOS

código	longitud [m]	peso [gr]	nº/caja
AS3040	1,5	1200	1
AS3041	2	1350	1



- **Dos conectores de aluminio con palanca de seguridad y un conector en acero con anillo de rosca incluidos**
- **Bandas elásticas**
- **Facilita los movimientos del operador gracias a un volumen reducido**

CUERDA DOBLE

ANTICAÍDA CON ABSORBEDOR

Certificado
CE EN 355

DATOS TÉCNICOS

código	longitud [m]	peso [gr]	nº/caja
AS3030	1,5	980	1
AS3031	2	1050	1

ST 010 ANCHOR TROLLEY

EN 795 B



Ref.: AT 100

Can be used with rails - width 65 - 120 mm;

Weight: 5,2 kg;

Material: galvanized steel, painted steel



← Anchor point



EXAMPLE: ST 010 with CR 200

TM-9 SAFETY TRIPOD

EN 795 class B



Ref.: AT 011

working load limit 500kg


breaking force: 22kN

version with webbing or chain

weight: 14,30kg - with webbing

17,30kg - with chain

We deliver tripod with chain and webbing.

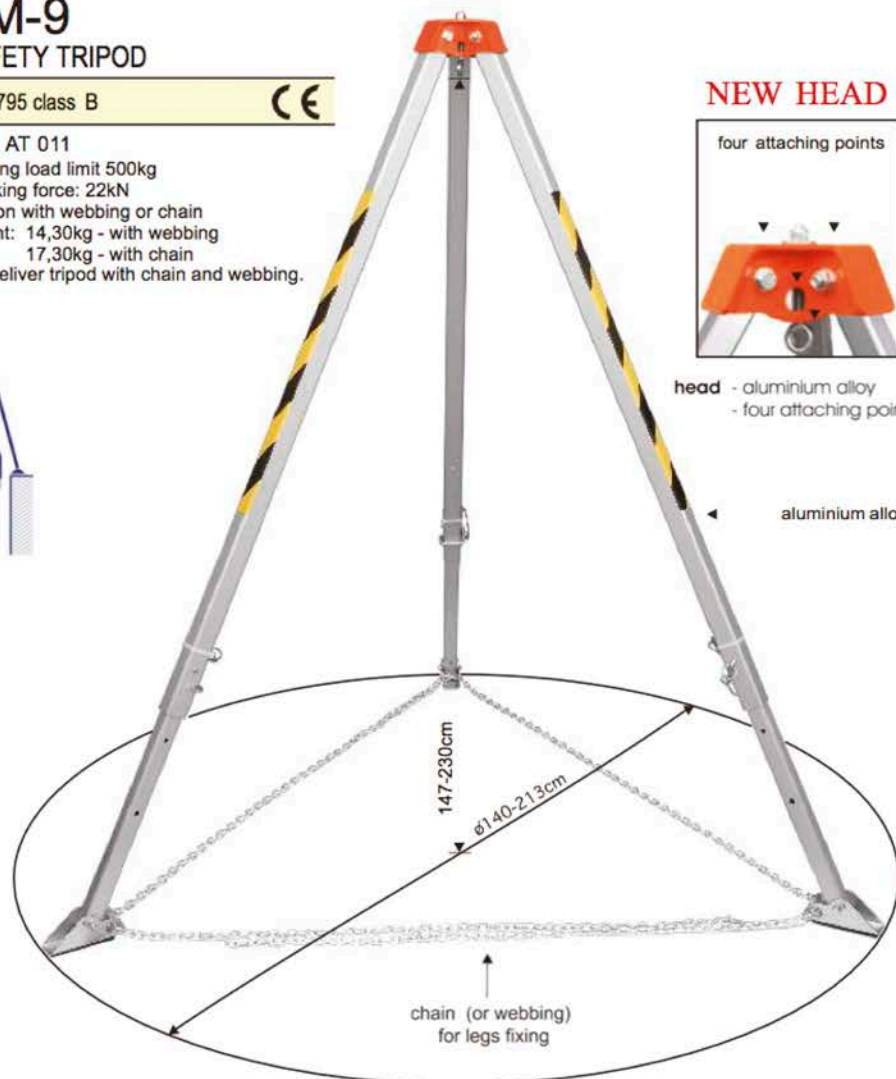

NEW HEAD

four attaching points



head - aluminium alloy
- four attaching points

← aluminium alloy

chain (or webbing)
for legs fixing

147-230cm

∅140-213cm

RETRACTILES

Modelo:

Retractable:
10 metros (AS3110)
15 metros (AS3115)
20 metros (AS3120)

Carcasa ABS
 Cable Acero



DISPOSITIVO RETRÁCTIL

CON CABLE EN ACERO

Certificado CE EN 360

- Carter en ABS ultra-resistente
- Cable en acero diametro 4,8 mm
- Adaptado también para uso horizontal, usando la cinta incluida
- Conector con libertad de movimiento incluido, además de un testigo de control



utilización del dispositivo

DATOS TÉCNICOS			
código	longitud (m)	peso (kg)	envase
AS3110	10	4,6	1
AS3115	15	7,2	1
AS3120	20	7,7	1

Modelo:

Retractable:
6 metros
Carcasa

Termoplástica
 Cable Acero

CR 200 steel cable retractor

EN 360



Ref.: CR 200 06 - cable length 6m
 Ref.: CR 200 10 - cable length 10m
 Ref.: CR 200 12 - cable length 12m
 Ref.: CR 200 15 - cable length 15m

Dimensions: 208 x 85 x 280 mm
 Weight:
 CR 200 06 - weight 5,10kg
 CR 200 10 - weight 5,30kg
 CR 200 12 - weight 5,90kg
 CR 200 15 - weight 6,10kg

AX 400 - light box for CR 200

Ref.: AX 400
NEW



grey & black

plastic case



Modelo:

Retractable:
10 metros
Carcasa

Termoplástica
 Cable Acero

SWIVEL SNAP HOOKS



AZ 030
 aluminum, galvanized steel
 opening: 23 mm
 weight: 200 g



AZ 031T
 aluminum, galvanized steel
 opening: 23 mm
 weight: 200 g
 twist lock



AZ 050
 galvanized steel
 opening: 23 mm
 weight: 360 g



AZ 051T
 galvanized steel
 opening: 23 mm
 weight: 360 g



AZ 002AS
 aluminum, galvanized steel
 opening: 24 mm
 weight: 215 g



AZ 060
 galvanized steel
 opening: 21 mm
 weight: 360 g